

# M1012 SERIES

## DOUBLE-CONVERSION ONLINE UPS



19" RACKMOUNT, 1U HIGH, MILITARY GRADE,  
UNIVERSAL INPUT RANGE, PURE SINE-WAVE OUTPUT,  
UP TO 1.25kW/1.5kVA.  
STACKABLE TO 7.5kW SINGLE-PHASE or 3.75kW 3-PHASE

**Highlights**

- Input / Output isolation
- Pure sine-wave output
- Remote control and telemetry
- Internal EMI filters
- Battery Management System
- Battery hot-swappable
- Safe LiFePO<sub>4</sub> battery chemistry
- Stackable for future proofing
  - 1-phase: up to 7.5kW
  - 3-phase: up to 3.75kW
- High efficiency design
- Protected against:
  - Short-circuit / Overload
  - Output over-voltage
  - Over temperature

**Electrical Specifications**

**Input**

Voltage range<sup>1</sup>: 85 to 265 V<sub>RMS</sub>  
 Frequency: 47-63 Hz / 400 Hz  
 High Power Factor<sup>2</sup>: > 0.98  
 Operates through transients  
 IAW MIL-STD-704A-F

**Output Voltage Regulation**

Less than ±3% (no load to full load, -20°C to +50°C).

**Backup**

Backup (full load, 0°C to +50°C): > 10 minutes  
 Charge time from depleted to full capacity (0°C to +40°C): < 6 hours  
 Battery life expectancy: at least 1000 cycles.

**Output** (Preset in factory)

Voltage: Up to 230V<sub>AC</sub>/400V<sub>DC</sub>  
 Frequency: Up to 800 Hz  
 Real Power: Up to 1250 W  
 Apparent power: Up to 1500 VA  
 Reactive power: Up to 830VAR

**Output Waveform**

Pure sinewave synthesized from a crystal oscillator, with THD<sub>V</sub> <1.5% into a linear load.

**Cooling**

Self-cooled by two internal fans. Thermally controlled fan speed, to reduce noise & increase reliability.  
 Can operate with reduced performance in case of fan failure. Fan assemblies are user replaceable.

**Isolation**

Input to Output: 1000 V<sub>DC</sub>  
 Input to Case: 1000 V<sub>DC</sub>  
 Output to Case: 1000 V<sub>DC</sub>

**EMC**

Designed to meet<sup>3</sup> MIL-STD-461F  
 CE101, CE102, CS101, CS114, CS115, CS116, RE102, RS103

<sup>1</sup> Power capability is derated to 1000W below 102V<sub>RMS</sub>. DC input optional with special variant. consult factory.

<sup>2</sup> Measured at 115V/60Hz with full resistive load

<sup>3</sup> Compliance achieved with shielded cables

**Protections <sup>4</sup>**

**Input**

- **Under Voltage Lock-Out**  
Input stage shuts down when input voltage falls below 80 V<sub>RMS</sub>
- **Surge Suppressor**  
Protection against fast transients
- **Catastrophic Failure Protection**  
20A circuit breaker on input line, to protect the user's system in case of internal failure.

**Output**

- **Overvoltage Protection**  
Output shuts down if output voltage exceeds a preset value due to internal failure.
- **Current Limiting**  
Current waveform is clamped (~21A<sub>pk</sub>@115V<sub>RMS</sub>), and the output current shape will be a sinewave with a “flat top”, approaching a square wave at short circuit.
- **Short Circuit Protection**  
At high overload/short-circuit, the output hiccups several times. If the high loading/short persists, the output will be shut down.

**General**

- **Over Temperature Protection**
  - **UPS** shuts down individual modules if their internal temperature exceeds a preset threshold. UPS resumes operation automatically upon cooldown.
  - **Charger/discharger** disconnects the battery if its temperature exceeds a preset threshold. In this case, the UPS continues operation *without backup*. Charger/discharger resumes normal operation automatically upon battery cool down.
- **Battery Management System**
  - **Overcharge:** Electronically disconnects the battery if overcharge state is detected.
  - **LVD:** Electronic Low Voltage Disconnect if battery voltage drops below preset threshold.
  - **Over Temperature:** Electronically disconnects the battery if the internal temperature exceeds a preset threshold.

<sup>4</sup> Thresholds and protections can be modified / removed – please consult factory.

**Environmental Conditions**

Designed to meet MIL-STD-810G

**Temperature**

Methods 501.5 & 502.5  
 Operating: -20 °C to +50 °C (ambient)  
 Charging: 0 °C to +40 °C (ambient)  
 Storage: -30 °C to +60 °C (ambient)

**Humidity**

Method 507.5  
 Up to 95% RH

**Vibration**

Method 514.6  
 Category 24 (IAW Figure 514.6E-1)  
 General minimum integrity exposure  
 1 hour per axis.

**Shock**

Method 516.6  
 20g, 11ms terminal peak saw-tooth

**Altitude**

Method 500.5  
 Procedures I – up to 40,000 ft. (non-operational)  
 Procedure II – up to 30,000 ft. (operational)

**Salt Fog**

Method 509.5

**Fungus**

Method 508.6


**Sand & Dust**

Method 510.5  
 Procedures I & II

**Acceptance Test Procedure (ATP) & Environmental Stress Screening (ESS)**

All units go through standard ATP and 24 hours burn-in. In addition, ESS (random vibration and thermal cycling) tests can be performed on each unit – please contact factory for further details.

**Simplified Block Diagram**

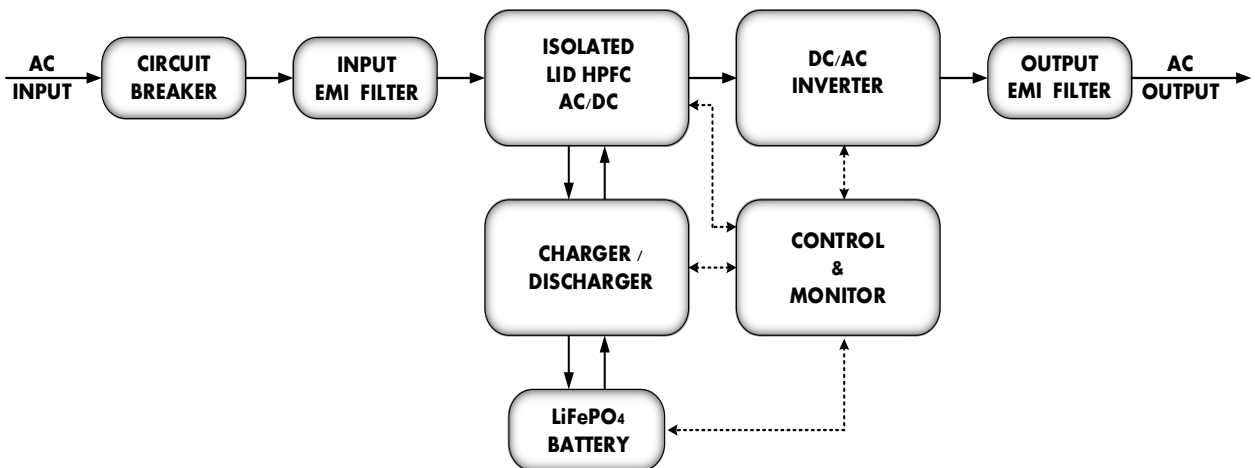

### Front Panel Layout




### Switches

Name	Description
PWR (Toggle switch)	Turns UPS ON or OFF
Multifunction (Momentary push button)	<ul style="list-style-type: none"> <li>• Silences active audible alarm</li> <li>• Turns output voltage OFF (Charge-only mode)</li> <li>• Prepares the UPS for battery hot-swap (disconnects battery pack)</li> </ul>

### Indications

Name	Description
INPUT OK	Input voltage in range
OUTPUT OK	Output voltage in range of nominal value
BATT IN USE	Battery discharging (UPS provides backup)
LOW BATT	Battery discharged to below 20% of full capacity.
OVER TEMP	Internal temperature exceeds a preset threshold. Indication resets when internal temperature drops back to normal
FAN A/B FAIL	FAN A / FAN B does not operate normally.
FAIL	General failure.

### Back Panel Layout

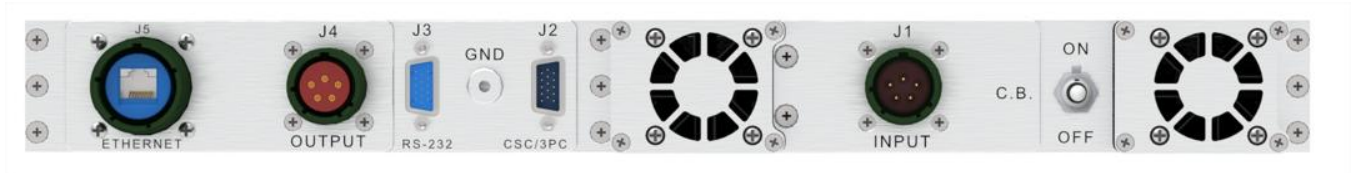

### Switches

Name	Description
AC INPUT ON/OFF	250V / 20A circuit breaker. Connects the UPS to the input voltage line and provides overload and short circuit protection against internal failures.

### Connectors

Designation	Name	Description
J1	INPUT	Input voltage connection. Single-phase, 85-265V <sub>rms</sub> , 47-63Hz
J2	CSC/3PC	The UPS can be configured to operate in parallel with other UPSs in current share mode, or in a 3-phase connection, by connecting an appropriate cable to this connector.
J3	RS-232	Remote communication, telemetry and control over RS-232 protocol. Remote controlled standby mode (via dry contact).
J4	OUTPUT	Output voltage connection.
J5	ETHERNET	Remote communication, telemetry and control, over Ethernet, via HTTP and SNMP.


**Pin Assignment**

**J1 – INPUT connector**

**Connector type:** D38999/20WD5PN or eq.

**Mates with:** D38999/26WD5SN or eq.

Pin No.	Function	Legend
A	GND	
B	Neutral	
C	Neutral	
D	Line	
E	Line	



**J2 – CSC/3PC connector**

**Connector type:** DD15M32000C-15 or eq.

**Mates with:** M24308/2-11F or eq.

Pin No.	Function
1	N/C (for future use)
2	N/C (for future use)
3	N/C (for future use)
4	RMT_OUT_SHDN
5	RMT_SHDN
6	Rx
7	N/C (for future use)
8	N/C (for future use)

Pin No.	Function
9	N/C (for future use)
10	N/C (for future use)
11	Tx
12	5V_SIG
13	SIGNAL RTN
14	N/C (for future use)
15	N/C (for future use)

**J3 – RS-232 connector**

**Connector type:** DD15S32000C-15 or eq.

**Mates with:** M24308/4-11F or eq.


Pin No.	Function	Pin No.	Function
1	AC_OFF_OUT	9	SET_PH0
2	SET_SLV	10	SET_PH1
3	PH_SLV_CFG	11	SYNC_OUT
4	CRNT_SHR_OUT	12	CRNT_SHR_IN_REF
5	CRNT_SHR_OUT_REF	13	SIGNAL_RTN
6	AC_OFF_IN	14	SLV_D_P
7	SYNC_IN	15	SLV_D_N
8	CRNT_SHR_IN		

**J4 – OUTPUT connector**

**Connector type:** D38999/20WF32SN or eq.

**Mates with:** D38999/26WF32PN or eq.

Pin No.	Function	Legend
A-H, U-Z, f, g	OUT	●
J-U, a-e, h, j	RTN	●



## ***Functions***

### **Pure Sine-Wave Output Voltage**

The UPS employs a double-conversion online topology. In this topology, the output voltage is ALWAYS generated inside the UPS, whether the input power is available or not.

This means that the load does not suffer from common problems of grid or generator connected loads, such as surges, sags, brown-outs, spikes, frequency transients and high harmonic content. This also means that the transfer from grid to battery backup, and vice versa, is seamless.

### **Backup**

The UPS contains a plug-in, hot-swappable, LiFePO<sub>4</sub> Battery Pack (MPS P/N M1012-3801), that provides, when fully charged, at least ten minutes of backup operation at full load when ambient temperature is between 0°C to +50°C, in case of input power loss. Operation at lower temperature down to -20°C is possible with reduced load.

### **Current Share**

This connector is used to connect a stack of up to six (6) UPS devices in parallel, in order to enable load current sharing. (Modification can be made to enable stacking of more than six UPSs. Please contact the factory for more details).

See parallel connection scheme in the M1012 User Manual.

### **3-Phase Configuration**

This connector is used to connect three units, in order to enable 3-phase connection, to support 3-phase loads of up to 1.25kW/1.5kVA per phase.

See 3-phase connection scheme in the M1012 user manual.

### **Load Gauge**

The UPS provides a ten-level load gauge, visible on the front panel and through the telemetry communication channels.

### **Battery Fuel Gauge**

The UPS provides a ten-level battery fuel gauge, visible on the front panel and through the telemetry communication channels.

### **Alarm**

The UPS provides alarms for various events, that can be viewed on the front panel and audibly heard. The alarms can also be viewed through the telemetry communication channels.



### **Cooling**

The UPS uses two internal fans to cool itself during operation.  
The fans speed is determined by the internal temperature.

A fan failure is a rare event. The fan's expected life is 40,000 hours @ 60°C ambient, or 70,000 hours @ 40°C ambient. However, if this failure occurs, please replace the fan as soon as possible. A spare part can be purchased from us for this purpose (MPS P/N M1012-3901).  
Please refer to M1012 User Manual for maintenance instructions.

In case of a fan failure, the appropriate FAN FAIL LED will light up on the front panel, and an indication will appear through the remote communication channel. The UPS will not shut down due to the fan failure itself, but it may shut down due to internal over temperature, that can occur at high power levels and within the normal ambient temperature range.

**Outline Drawing**

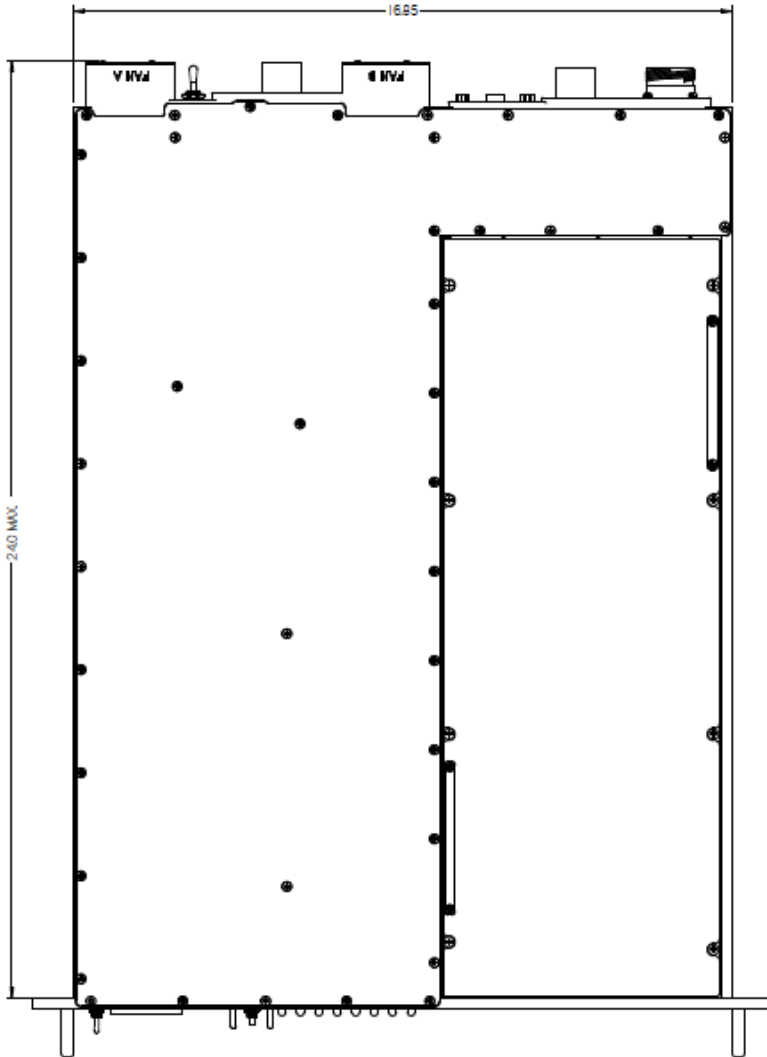

**Notes**

1. Dimensions are in inches
2. Tolerance is:  
.XX ± 0.01 in  
.XXX ± 0.005 in
3. Weight: Approx. 36 lbs.

**Note: Specifications are subject to change without prior notice by the manufacturer**