

# M169 SERIES

## SINGLE-OUTPUT, UP TO 1KW AC/DC POWER SUPPLY

The M169 is a series of mechanically robust, base plate cooled, high performance, 1kW single output AC to DC power supplies, for Navy shipboard, Airborne, and ground applications.

The M169 converts 85 V<sub>AC</sub> -265 V<sub>AC</sub> /50-60Hz or 85 V<sub>AC</sub> -150 V<sub>AC</sub> /400Hz, to a well-regulated, filtered and protected DC Output.



### THE MAIN FEATURES OF THE M169 ARE:

- AC/DC Single output power supply up to 1kW
- 85V<sub>AC</sub>-265V<sub>AC</sub>/50-60Hz or 85V<sub>AC</sub>-150V<sub>AC</sub> / 400Hz Standard Input version, single-phase
- For extended input version - **Please contact factory for more details**
- High efficiency
- Wide input range
- High power factor
- Input / Output isolation
- Remote sense compensation
- Remote Inhibit (On/Off)
- External sync. capability
- EMI filters included
- Inrush Current Limiter
- Non-latching protections:
  - Overload/Short-circuit
  - Output Overvoltage
  - Over Temperature
  - Input Undervoltage Lockout

## M169 Series– AC/DC Power Supply

### Standard Models List (for other voltages – consult factory)

| Part number | Input                  |             | Output              |         | Special features   |
|-------------|------------------------|-------------|---------------------|---------|--|
|             | Voltage range          | Frequency   | Voltage             | Current |  |
| M169-100    | 85-265VAC/Single phase | 50/60/400Hz | 5 V <sub>DC</sub>   | 70 A    |  |
| M169-101    | 85-265VAC/Single phase | 50/60/400Hz | 12 V <sub>DC</sub>  | 70 A    |  |
| M169-102    | 85-265VAC/Single phase | 50/60/400Hz | 24 V <sub>DC</sub>  | 42 A    |  |
| M169-103    | 85-265VAC/Single phase | 50/60/400Hz | 28 V <sub>DC</sub>  | 36 A    |  |
| M169-104    | 85-265VAC/Single phase | 50/60/400Hz | 48 V <sub>DC</sub>  | 21 A    |  |
| M169-105    | 85-265VAC/Single phase | 50/60/400Hz | 270 V <sub>DC</sub> | 4 A     |  |
| M169-106    | 85-265VAC/Single phase | 50/60/400Hz | 28 V <sub>DC</sub>  | 36 A    | Parallel operation via output voltage droop. Voltage regulation is ±2%.. |
| M169-107    | 85-265VAC/Single phase | 50/60/400Hz | 48 V <sub>DC</sub>  | 21 A    | Parallel operation via output voltage droop. Voltage regulation is ±2%.. |
| M169-108    | 85-265VAC/Single phase | 50/60/400Hz | 24 V <sub>DC</sub>  | 42 A    | Parallel operation via output voltage droop. Voltage regulation is ±2%.. |

- Additional standard configurations available. **Contact factory for more details.**
- All of our products can be configured to comply with EU REACH regulations. **Contact factory for more details.**

**SPECIFICATIONS:**

|                              |  |   |
|------------------------------|--|---|
| <b>AC Input</b>              | <b>Voltage Range</b>   | Option 1: 85 V <sub>AC</sub> -265 V <sub>AC</sub> /50 Hz - 60 Hz / Single-phase<br>Option 2: 85 V <sub>AC</sub> -150 V <sub>AC</sub> /400 Hz / Single-phase<br>For extended input version - <b>Please contact factory for more details</b>  |
|                              | <b>Isolation</b>   | 1 000 V <sub>DC</sub> Input to Output<br>1 000 V <sub>DC</sub> Input and Case   |
|                              | <b>Spikes</b>  | <b>Optional</b> to withstand 1000 V spikes IAW MIL-STD-1399-300B. <b>please consult factory</b>   |
| <b>DC Output</b>             | <b>Rating</b>  | See table on page 8   |
|                              | <b>Voltage Regulation</b>  | Up to ±1% (no load to full load, -40 °C to +85 °C and over normal input voltage range).   |
|                              | <b>Remote Sense</b>  | The SENSE is used to achieve accurate load regulations at load terminals (this is done by connecting the pins directly to the load's terminals).<br>For output voltage above 8V, the use of remote sense has a max limit of 0.25V voltage dropout between converter's output and load terminals.<br>For output voltage below 8V, the use of remote sense has a max limit of 0.5V voltage dropout between converter's output and load terminals.<br>When not used connect SENSE to OUT and SENSE RTN to OUT RTN. |
|                              | <b>Ripple and Noise</b>  | (max. 1%) measured at load across 1 µF and 0.1 µF ceramic capacitors.   |
|                              | <b>Isolation</b>   | 200 V <sub>DC</sub> Output and Case. (At M169-105 it is 500V <sub>DC</sub> )  |
|                              | <b>Current Limit &amp; Overload</b>  | Output turns off and on periodically (hiccup) until fault is condition removed. Protection threshold set at 120% ± 10% of maximum current   |
|                              | <b>Efficiency</b>  | Up to 85-87% - typical (nominal input voltage, full load, room temperature)   |
|                              | <b>Overvoltage Protection</b>  | <b>Active Over-Voltage Protection</b><br>Internal control shuts output down if voltage exceeds 110% ± 5% of nominal.<br><b>Passive Over-Voltage Protection</b><br>A transorb, rated to 120% ± 10% of nominal voltage, is placed across the output   |
| <b>Over Temp. Protection</b> | Unit shuts down if baseplate temperature exceeds 100 ± 5 °C.<br>Automatic recovery upon cooldown to below 90 ± 5 °C. |   |

Specifications (Cont.):


|  |                            |  |
|--|----------------------------|--|
| <b>Control &amp; Indication</b>                  | <b><i>ON/OFF input</i></b> | <p>The INHIBIT IN signal is used to turn the power supply ON and OFF.</p> <p>TTL “1” or OPEN – will turn on the power supply. (For normal operation leave the signal not connected.)</p> <p>TTL “0” – will turn off the power supply.</p> <p>Ground reference for the INHIBIT IN signal is SIGNAL RTN (pin #1).</p> <p>Optional on/off ENABLE IN signal - Please consult factory:</p> <p>TTL “0” or OPEN – will turn on the power supply. (For normal operation leave the signal not connected.)</p> <p>TTL “1” – will turn off the power supply.</p> <p>Ground reference for the ENABLE IN signal is SIGNAL RTN (pin #1).</p> |
|  | <b><i>INHIBIT OUT</i></b>  | <p>Used when connecting two units or more in parallel.</p> <p>Connect this signal to the INHIBIT IN pin of the slave unit (see diagram below). This signal synchronizes the shutdown and startup of the units.</p>   |
|  | <b><i>SYNC IN</i></b>      | <p>The SYNC IN signal is used to allow the power supply frequency to sync with the system frequency. The system frequency should be 250 kHz ± 10 kHz.</p> <p>When not connected the power supply will work at 250 kHz ± 10 kHz.</p>  |
|  | <b><i>SYNC OUT</i></b>     | <p>The SYNC OUT signal is used to sync the system with the power supply frequency.</p>   |
|  | <b><i>SIGNAL RTN</i></b>   | <p>The SIGNAL RTN is a floated ground.</p> <p>This pin is used as ground return for SYNC IN, SYNC OUT, INHIBIT IN and INHIBIT OUT signals.</p>   |
| <b>Environment Designed to meet MIL-STD-810F</b> | <b><i>Temperature</i></b>  | <p>Methods 501.4 &amp; 502.4</p> <p>Operating: –40 °C to +85 °C (at baseplate)</p> <p>Storage: –55 °C to +125 °C (ambient)</p>   |
|  | <b><i>Humidity</i></b>     | <p>Method 507.4</p> <p>Procedure I</p> <p>Up to 95% RH</p>   |
|  | <b><i>Salt-fog</i></b>     | <p>Method 509.5</p>  |
|  | <b><i>Altitude</i></b>     | <p>Method 500.4</p> <p>Procedures I – up to 70,000 ft. (non-operational)</p> <p>Procedure II – up to 40,000 ft. (operational)</p>  |

## M169 Series– AC/DC Power Supply


|                    |  |   |
|--------------------|--|---|
|                    | <b>Mechanical Shock</b>  | Method 516.5<br>Procedure I<br>30 g, 11 ms terminal peak saw-tooth                              |
|                    | <b>Vibration</b>   | Method 514.5<br>Procedure I<br>Category 24 - General minimum integrity exposure                 |
|                    | <b>Fungus</b>  | Does not support fungus growth, in accordance with the guidelines of MIL-STD-454, Requirement 4 |
| <b>EMI</b>         | <b>MIL-STD-461F</b>  | Designed to meet* MIL-STD-461F<br>CE101, CE102, CS101, CS114, CS115, CS116, RE101, RS101, RS103 |
| <b>Reliability</b> | 150,000 hours, calculated per MIL-STD-217F Notice 2 at +85 °C baseplate, Ground Fixed environment. |   |
| <b>Form factor</b> | 5.51" wide, 1.50" high and 9.84" deep. For detailed dimensions and tolerances see Drawing: M169001 |   |
| <b>Weight</b>      | 1.92kg (4.25lbr)   |   |
| <b>Connectors</b>  | See Page 9-11  |   |

\*Compliance achieved with shielded harness and static resistive load.

**TYPICAL STAND-ALONE CONNECTION DIAGRAM**

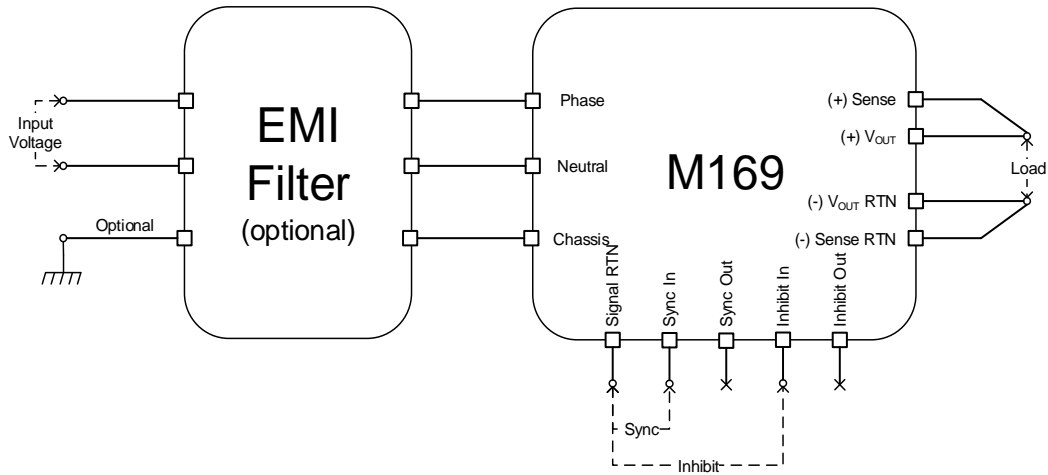

**TYPICAL PARALLEL CONNECTION DIAGRAM**

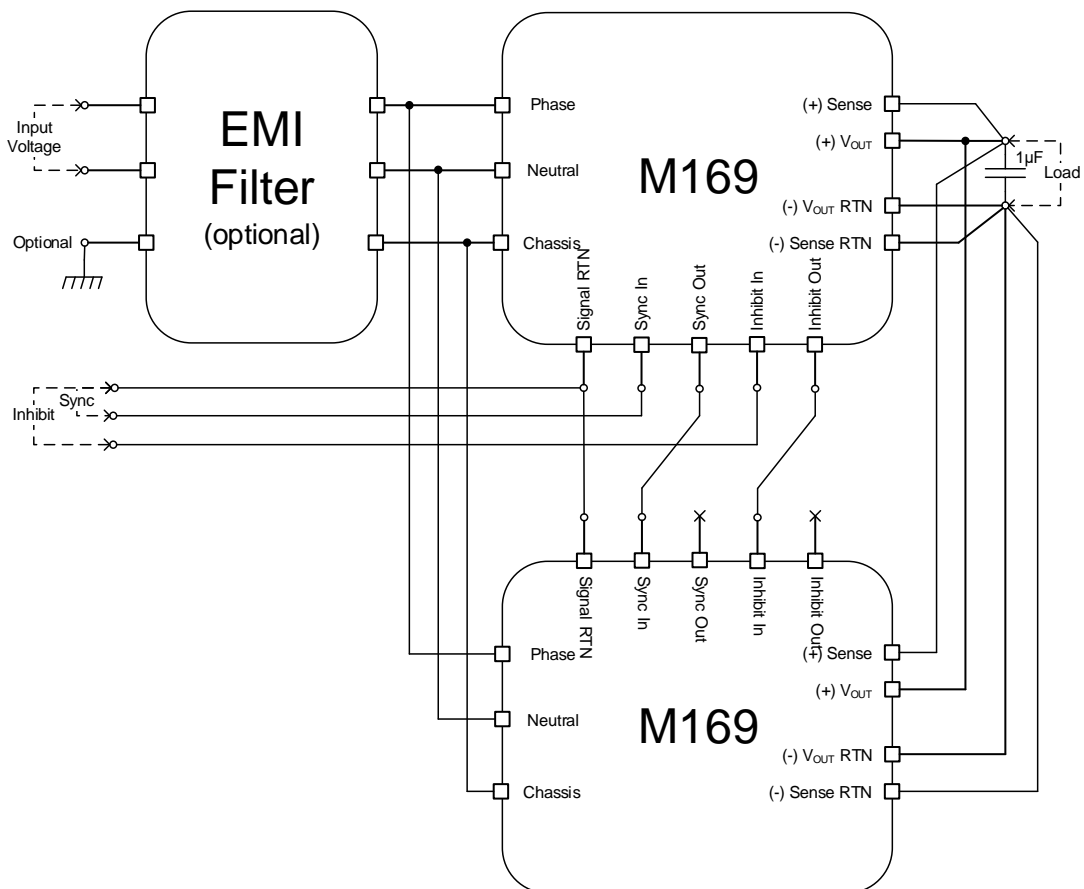

# M169 Series– AC/DC Power Supply

## PIN ASSIGNMENT: J1 - INPUT CONNECTOR

**Connector type:** M24308/24-38F or eq.

**Mates with:** M24308/2-2F or eq.

| Pin # | Function | P | Pin # | Function | P | Pin # | Function | P |
|-------|----------|---|-------|----------|---|-------|----------|---|
| 1     | PHASE    | ~ | 6     | NEUTRAL  | 0 | 11    | N.C.     |   |
| 2     | PHASE    | ~ | 7     | N.C.     |   | 12    | NEUTRAL  | 0 |
| 3     | PHASE    | ~ | 8     | CHASSIS  |   | 13    | NEUTRAL  | 0 |
| 4     | N.C.     |   | 9     | PHASE    | ~ | 14    | NEUTRAL  | 0 |
| 5     | NEUTRAL  | 0 | 10    | PHASE    | ~ | 15    | N.C.     |   |

**Note:** All pins with identical function/designation should be connected together for optimal performance.

**CHASSIS Note: Chassis PIN**

This pin is connected to the converter's chassis.




## PIN ASSIGNMENT: J2 - OUTPUT CONNECTOR

**Connector type:** M24308/23-41F or eq.

**Mates with:** M24308/4-5F or eq.

| Pin # | Function   | P | Pin # | Function    | P | Pin # | Function   | P |
|-------|------------|---|-------|-------------|---|-------|------------|---|
| 1     | SIGNAL RTN | - | 18    | INHIBIT OUT | + | 35    | INHIBIT IN | + |
| 2     | SYNC OUT   | + | 19    | SENSE RTN   | - | 36    | N.C.       |   |
| 3     | SENSE      | + | 20    | OUT         | + | 37    | OUT        | + |
| 4     | OUT        | + | 21    | OUT         | + | 38    | OUT        | + |
| 5     | OUT        | + | 22    | OUT         | + | 39    | OUT        | + |
| 6     | OUT        | + | 23    | OUT         | + | 40    | OUT        | + |
| 7     | OUT        | + | 24    | OUT         | + | 41    | OUT        | + |
| 8     | OUT        | + | 25    | OUT         | + | 42    | OUT        | + |
| 9     | OUT        | + | 26    | OUT         | + | 43    | OUT        | + |
| 10    | OUT        | + | 27    | OUT RTN     | - | 44    | OUT RTN    | - |
| 11    | OUT RTN    | - | 28    | OUT RTN     | - | 45    | OUT RTN    | - |
| 12    | OUT RTN    | - | 29    | OUT RTN     | - | 46    | OUT RTN    | - |
| 13    | OUT RTN    | - | 30    | OUT RTN     | - | 47    | OUT RTN    | - |
| 14    | OUT RTN    | - | 31    | OUT RTN     | - | 48    | OUT RTN    | - |
| 15    | OUT RTN    | - | 32    | OUT RTN     | - | 49    | OUT RTN    | - |
| 16    | OUT RTN    | - | 33    | OUT RTN     | - | 50    | OUT RTN    | - |
| 17    | OUT RTN    | - | 34    | SYNC IN     | + |       |            |   |

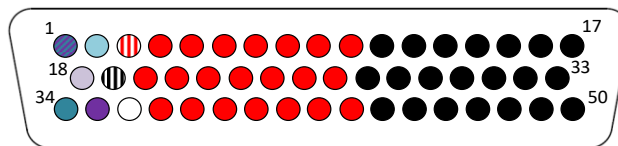


**Note:** All pins with identical function/designation should be connected together for optimal performance.

**CHASSIS Note: Chassis PIN**

This pin is connected to the converter's chassis.

**HV option: High voltage version (100 to 300 VDC)**

| Pin # | Function   | P | Pin # | Function    | P | Pin # | Function   | P |
|-------|------------|---|-------|-------------|---|-------|------------|---|
| 1     | SIGNAL RTN | - | 18    | INHIBIT OUT | + | 35    | INHIBIT IN | + |
| 2     | SYNC OUT   | + | 19    | N.C.        | - | 36    | N.C.       |   |
| 3     | N.C.       | + | 20    | OUT         | + | 37    | OUT        | + |
| 4     | OUT        | + | 21    | OUT         | + | 38    | OUT        | + |
| 5     | OUT        | + | 22    | OUT         | + | 39    | OUT        | + |
| 6     | OUT        | + | 23    | OUT         | + | 40    | OUT        | + |
| 7     | OUT        | + | 24    | OUT         | + | 41    | OUT        | + |
| 8     | OUT        | + | 25    | OUT         | + | 42    | OUT        | + |
| 9     | OUT        | + | 26    | OUT         | + | 43    | OUT        | + |
| 10    | OUT        | + | 27    | OUT RTN     | - | 44    | OUT RTN    | - |
| 11    | OUT RTN    | - | 28    | OUT RTN     | - | 45    | OUT RTN    | - |
| 12    | OUT RTN    | - | 29    | OUT RTN     | - | 46    | OUT RTN    | - |
| 13    | OUT RTN    | - | 30    | OUT RTN     | - | 47    | OUT RTN    | - |
| 14    | OUT RTN    | - | 31    | OUT RTN     | - | 48    | OUT RTN    | - |
| 15    | OUT RTN    | - | 32    | OUT RTN     | - | 49    | OUT RTN    | - |
| 16    | OUT RTN    | - | 33    | OUT RTN     | - | 50    | OUT RTN    | - |
| 17    | OUT RTN    | - | 34    | SYNC IN     | + |       |            |   |

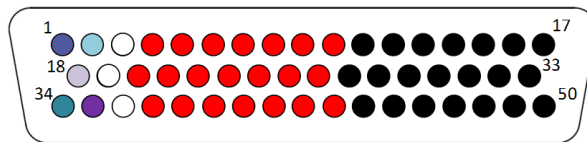


**Note:** All pins with identical function/designation should be connected together for optimal performance.

**CHASSIS Note: Chassis PIN**


This pin is connected to the converter's chassis.

**OUTLINE DRAWING:**

*For detailed dimensions and tolerances see Drawing: M169001*

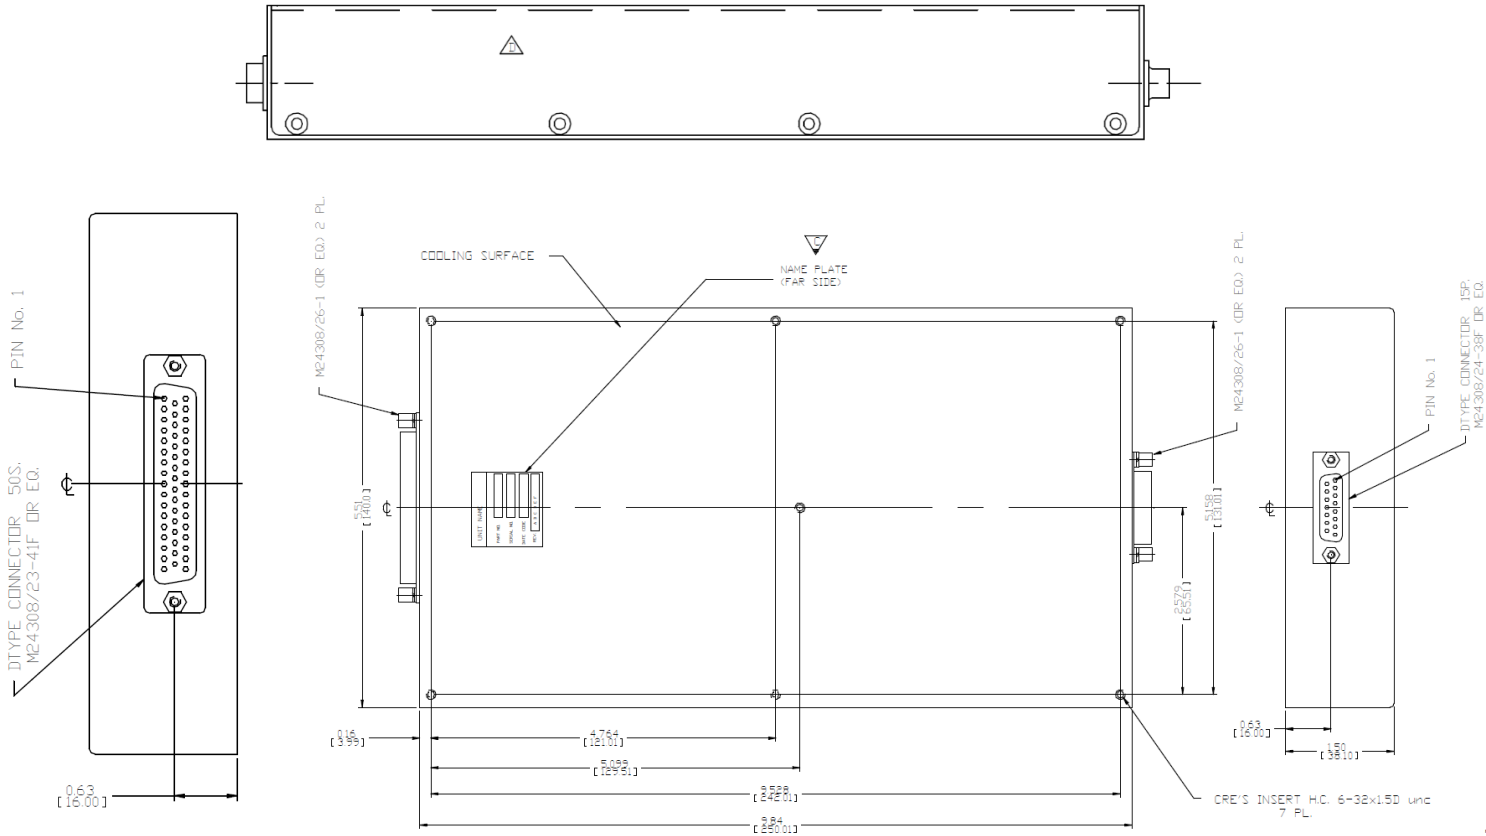

**HEAT DISSIPATION SURFACE:**

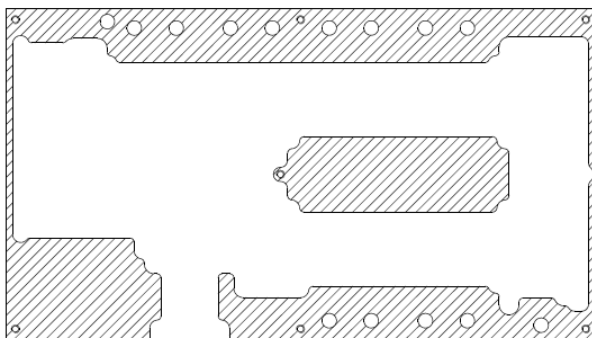

Dissipation Area  
21.08 in<sup>2</sup>  
(13,600 mm<sup>2</sup>)

**Notes**

1. Dimensions are in inches [mm]
2. Tolerance is:  
.XX ± .02 in  
.XXX ± .01 in
3. Weight: 4.25 lbs [1922 g]

*Note: Specifications are subject to change without prior notice by the manufacturer.*