

M4703 SERIES

DC/DC POWER SUPPLY



PRODUCT HIGHLIGHTS

- VITA 62 COMPLIANT
- 6U VPX FORM FACTOR
- SOSA™ ALIGNED
- DC/DC CONVERTER
- Up to 1200W Steady State
- 1500W Peak Power
- Cyber Secure

M4703 Series– DC/DC Power Supply

Applications

Military (Airborne, ground-fix, shipboard), Ruggedized, Telecom, Industrial

Special Features

- VITA 62 6U
- SOSA™ Aligned
- High efficiency
- Input / Output isolation
- Remote sense
- EMI filters included
- Fixed switching frequency
- Parallel configuration
- 46.11 Tier 2 communication
- External Inhibit & Enable
- Indefinite short circuit protection with auto-recovery
- Over temperature shutdown with auto recovery

Electrical Specifications

DC Input

200-330 VDC

- Works Through MIL-STD-704 (B-F) Normal and Abnormal Steady State.
- Works Through MIL-STD-704(E-F) Normal transients
- Protected MIL-STD-704(B-D) Normal/Abnormal Transients
- Protected MIL-STD-704(E-F) Abnormal Transients
- Optional: Works Through MIL-STD-704(E-D) Abnormal Transients

Line/Load regulation

±1% or better (no load to full load, low line to high line (-55°C to 85°C).

Ripple and Noise

Less than 50mV_{p-p}, typical (max. 1%), measured across 0.1µF and 10µF on Load

System Management Options

- 1) I2C
 - 2) VITA 46.11 Tier I IPMC
 - 3) VITA 46.11 Tier II IPMC
- Data available:
- Output voltages and currents
 - Input voltage
 - Card temperature
 - Card status

DC Outputs

PO1/PO2/PO3

12V/100A 3.3V_{aux}

3.3V/30A

±12V_{aux} - Optional

Total Steady state Power 1200W

(-55°C to +85°C).

Peak Power 1500W¹

Hold Up

N/A

Current Share

12V Active Current share

3.3V_{aux} Passive Current

Share (3.3V_{aux} ACS optional)

Load Transient

Output dynamic response up to 5%

at step load of 30%-90%.

Output return to steady stated

within 300-500µSec

Power Factor

N/A

Isolation

500V_{DC} Input to Output

500V_{DC} Input to Case

500V_{DC} Output to Case

EMC

Designed to meet

MIL-STD-461F²

CE102, CS101,

CS114, CS115

&CS116, RE102

Efficiency

Typical 89% (Nominal line, nominal load, room temperature)

Notes:

¹ Contact Factory for peak power options

² RE102 Supported at system Level

M4703 Series– DC/DC Power Supply

Protections (Thresholds and protections can be modified / removed – please consult factory).

| | | |
|--|---|---|
| <p>Input</p> <ul style="list-style-type: none"> • Inrush Current Limiter: peak value of $5 \times I_{IN}$ for inrush currents lasting longer than 100μs. • Under Voltage Lock-Out Unit shuts down when input voltage is below 190Vdc \pm 5Vdc. • Catastrophic Failure Protection Fuses are available to protect from catastrophic failure. The fuses are rated not to engage due to any normal type operation. | <p>Outputs</p> <ul style="list-style-type: none"> • Over Voltage Protection: 12V Active & Passive OVP 3.3Vaux Active & Passive OVP \pm12Vaux Active & Passive OVP • Overload / Short Circuit Protection 12V Output-Continuous Hiccup protection (110-130%). 3.3Vaux – Typical 33A \pm12Vaux – Typical 3A | <p>General</p> <ul style="list-style-type: none"> • Over temperature Protection: Shutdown at +100 °C \pm 5°C Recovery at +90 °C \pm 5°C Temperature measured at Unit edge. |
|--|---|---|

| | | |
|--|--|---|
| <p>Environmental Designed to meet MIL-STD-810G and VITA 47</p> | | |
| <p>Temperature Operating: –55°C to +85°C (at plug-in card edge, IAW VITA 62 CC4) Storage: –55°C to +125°C</p> <p>Humidity 810G Method 507.5 & VITA 47 Para. 5.6, Up to RH 95%.</p> <p>Reliability > 314,000 hours, calculated per MIL-STD-217F Notice 2 at +65°C at wedge lock edge, Ground Fixed.</p> | <p>Altitude 810G Method 500.5, Procedure II (Operational) & VITA 47 para. 5.7 60,000 ft.</p> <p>Vibration 810G Method 514.6 Procedure I. General minimum integrity exposure. (1 hour per axis & VITA 47 Vibration Class V3</p> | <p>Salt Fog Method 509.5</p> <p>Shock 810G Method 516.6 Procedure I & VITA 47 Shock Class OS2 Saw-tooth, 40g peak, 11ms</p> |

Environmental Stress Screening (ESS)

Including random vibration and thermal cycles is also available. **Please consult factory for details.**

Functions and Signals (according to VITA 62.0)

| Signal Name | Type | Description |
|--------------|---------------|--|
| FAIL* | Output | Indicates to other modules in the system that a failure has occurred in one of the outputs. Please refer to Figure 2 |
| SYSRESET* | Output | Indicates to other modules in the system that all outputs are within ¹ their working level. Please refer to Figure 2 |
| INHIBIT* | Input | Controls power supply outputs. This signal in conjunction with Enable controls the outputs. Please refer to Table 1 and Figure |
| ENABLE* | Input | Controls power supply outputs. This signal in conjunction with INHIBIT controls the outputs. Please refer to Table 1 and Figure 1 |
| GA0-4*, GAP* | Input | Used for geographical addressing. GA4 is the most significant bit and GA0 is the least significant bit. |
| SCL, SDA | Bidirectional | I2C bus Clock and Data respectively. Through this bus the voltage and temperature readouts can be shared. |
| Sync In | Input | The Sync signal is used to allow the power supply frequency to sync with the system frequency. (Optional) |
| Sync Out | Output | Send Internal switching frequency. (Optional) |
| VOUT SENSE | Input | The SENSE is used to achieve accurate load regulations at load terminals (this is done by connecting the pins directly to the load's terminals). |
| Alert Bit | Output | Indicates to other modules in the system about Input Voltage loss. Please refer to Figure 2 |
| 12VCS | Bidirectional | Support current share between Outputs. Two pins required. ^{1 2} |
| 12V ACS | Bidirectional | Support Active current share between Outputs. See Current Share para. ^{1 2} |
| 3.3Vaux CS | Bidirectional | Support Active current share between Outputs. See Current Share para. ^{1 2} |
| 3.3Vaux ACS | Bidirectional | Support Active current share between Outputs. See Current Share para. ^{1 2 3} |

Notes:

¹ All Signals referenced to **SIGNAL RTN**

² When not used leave open

³ Non-SOSA™ configuration

Table 1 – Inhibit and Enable Functionality

| | | | | |
|-------------------|-----|------|------|------|
| INHIBIT* | Low | Low | High | High |
| ENABLE* | Low | High | Low | High |
| 12V Output | OFF | OFF | ON | OFF |
| 3.3V_AUX | ON | OFF | ON | OFF |

Figure 1 – Inhibit and Enable Input stage


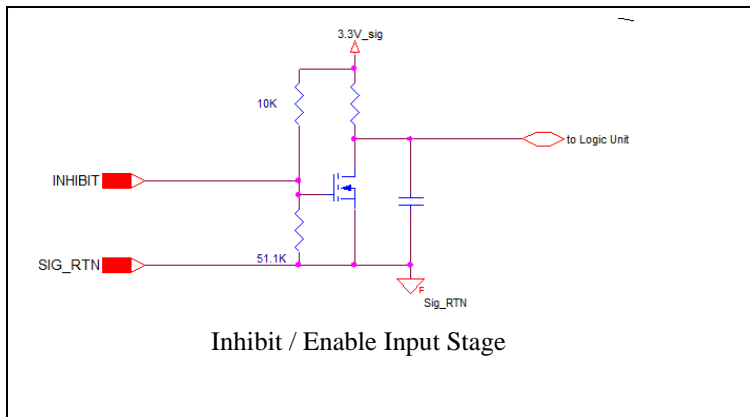


Figure 2 – SysReset and Fail Bit Output Stage

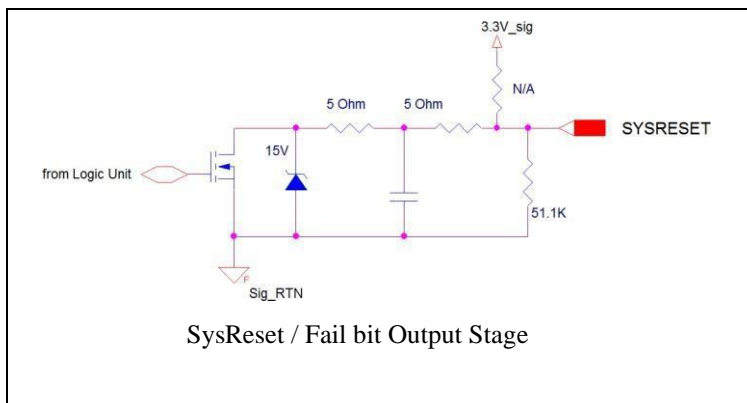

Detailed Information

1. Input Voltage Operation.

The M4703 steady state operation is per Mil-STD-704. Unit will work thorough all Normal Transients per Mil- STD-704 B to F, protected to all other transients and interrupts.


2. Outputs Voltage Regulation

The M4703 contains accurate internal sense lines to keep output voltage at less than 3% regulation for all Line / Load and temperature range (see Table 2).

| Output | 12V Output | 3.3Vaux Output |
|---------------|---------------|----------------|
| Voltage Range | 11.85 – 12.15 | 3.25 – 3.4 |

Table 2: Outputs voltage regulation. Temperature -55°C – 85°C

2.1 Sense Lines

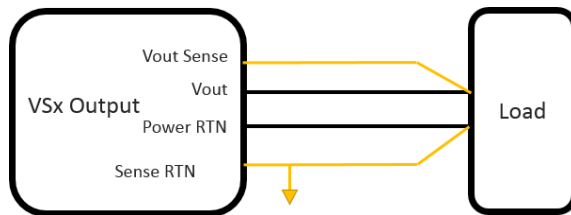

1.1 Holdup

N/A

1. Current Share (C.S)

Current Share of two or more units is optional (Contact Factory)
 12V output and 3.3VAux will current share with about 2-4A load balance.

2. Active Current Sharing (A.C.S)

Current share done in a closed-loop. All paralleled outputs are compared and feedback is used to balance their load current. The result is a more stable, less sensitive output voltage without voltage drop. Typical Load Balance of about 1 to 4A for all Load range is expected.

ACS is supported by the 12V output. Optional for 3.3Vaux^{1 2}.

3. 3.3Vaux Passive current sharing (P.C.S)

Current sharing is done in open loop, output voltage drops as a function of output load. Load Balance of about 5-10% is expected. 3.3Vaux ACS is optional^{1 2}


4. Current share connection between two Units.

For a required output to current share please connect the following Pins between the two units

- PO#_Sense & PO#_Sense_RTN (for best performance, Pins from paralleled units should be connected to a single point and as close as possible to the load point)
- Connect A7, B7 AND C7 to corresponding pin between units (A7 to A7, etc.)
- Connect B1 for 3.3Vaux ACS (Optional, not per SOSA pinout. This pin is internally N.C if not ordered)

When not used, all share pins can be left open.

Typical ACS Dynamic Load of Two 12V Paralleled Outputs

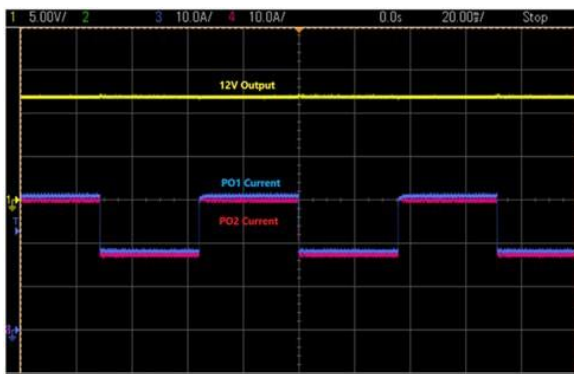

Notes:

¹ When not used, share pins can be left open.

² When ordering 3.3Vaux P.C.S or Non-Current Share unit, those pins are Internally disconnected

1. EMI CE102 tests

5. Communication Protocol

Unit communication protocol can be configured as VITA 46.11 Tier 2 IPMC, VITA 46.11 Tier 1 IPMC or Advanced I2C protocol. For more details on protocols refer to para. 5.1 and 5.2

5.1 Advanced I2C Protocol

Electrical Parameters

| | |
|-------------------|--------|
| Vcc | 3.3VDC |
| Pull-up | 20kOhm |
| Input capacitance | 100pf |

Slave Device Addressing

- 256 address spaces
- Baud rate: 200kHz maximum
- 7 Bit Protocol
- Support Slot Addressing per VITA 62

| | MSB | | | | | | | LSB |
|-------------|-----|---------|----------|---------|---------|---------|---------|-----|
| Slot Number | A6 | A5/*GAP | A4/*GA41 | A3/*GA3 | A2/*GA2 | A1/*GA1 | A0/*GA0 | R/W |
| Slot0 | 1 | 0 | 0 | 0 | 0 | 0 | 0 | |
| Slot1 | 1 | 0 | 0 | 0 | 0 | 0 | 1 | |
| Slot2 | 1 | 0 | 0 | 0 | 0 | 1 | 0 | |
| Slot3 | 1 | 0 | 0 | 0 | 0 | 1 | 1 | |

* Slot location is determined by GAx per VITA 62.

Communication Supported

Read Command – 21Hex, deliver 64Bytes of Data. (More commands are available by request) The communication starts when the master sends a start followed by the unit slave address, command, checksum and a stop. A second start followed by the slave address and a read will be followed by a 64 Bytes response.

| S | Slave Address | R/W | A | Command | A | Check sum | A | P |
|---|---------------|-----|---|---------|---|-----------|---|---|
| | A6:A0 | 0 | 0 | 21 Hex | 0 | DF Hex | 0 | |

| S | Slave Address | R/W | A | DATA | A | DATA | A | DATA | A | ... | DATA | A | Check sum | N/A | P |
|---|---------------|-----|---|-------|---|-------|---|-------|---|-----|-------|---|-----------|-----|---|
| | A6:A0 | 1 | 0 | D7:D0 | 0 | D7:D0 | 0 | D7:D0 | 0 | | D7:D0 | 0 | D7:D0 | 1 | |

Command -21Hex read all 64 Bytes

S- Start

P-Stop

| Master Transmit | Unit Transmit |
|-----------------|---------------|
|-----------------|---------------|

M4703 Series– DC/DC Power Supply

Memory Space

| Response Byte # | Data Type | Meaning | Interpretation | Reading Range |
|-----------------|-----------------------------|--------------------------|---|---------------|
| 0 | U Integer, MSB First | Echo of Command | | 21 Hex |
| 1 | U Integer, MSB First | N/A | | 00 Hex |
| 2 | S Integer, MSB First | Temperature | T(C°)=+/- 7bit Dec | -55 to 125 °C |
| 3 | U Integer, MSB First | Reserved | 00Hex | |
| 4-5 | U Integer, MSB First | PO1 12V Voltage | V(out) = Data/ m2 | 20.48V |
| 6-7 | U Integer, MSB First | PO2 12V Voltage | V(out) = Data/ m2 | 20.48V |
| 8-9 | U Integer, MSB First | PO3 12V Voltage | V(out) = Data/ m2 | 20.48V |
| 10-11 | U Integer, MSB First | 3.3V Aux Voltage | V(out) = Data/ m2 | 20.48V |
| 12-13 | U Integer, MSB First | 12VAux Voltage | V(out) = Data/ m2 | Optional |
| 14-15 | U Integer, MSB First | (-)12V Aux Voltage | V(out) = Data/ m2 | Optional |
| 16-17 | U Integer, MSB First | 12V Total Current | V(out) = Data/ m3 | 140A |
| 18-19 | U Integer, MSB First | 12V Total Current - Copy | V(out) = Data/ m3 | 140A |
| 20-21 | U Integer, MSB First | 12V Total Current - Copy | V(out) = Data/ m3 | 140A |
| 22-23 | U Integer, MSB First | 3.3VAux Current | V(out) = Data/ m5 | 20A |
| 24-35 | U Integer, MSB First | 12V Aux Current | V(out) = Data/ m4 | Optional |
| 26-27 | U Integer, MSB First | (-)12V Aux Current | V(out) = Data/ m4 | Optional |
| 28-29 | U Integer, MSB First | Reserved | 00Hex | |
| 30-31 | U Integer, MSB First | Reserved | 00Hex | |
| 32-51 | Character String (ASCII) | Part Number | M4703-xxx* (Note1) | 20 Characters |
| 52-53 | Decimal, MSB First | Serial Number, 2MSB Dig | X,X Dec (Note2) | Optional |
| 54-55 | Decimal, MSB First | Serial Number, 2LSB Dig | X,X Dec (Note2) | Optional |
| 56-57 | Decimal, MSB First | Date Code | Week, Year (Note3) | Optional |
| 58-59 | Character String (ASCII) | Hardware Rev | B01 & B02 Boards (note4) | 2 Characters |
| 60-61 | Decimal, MSB First | Firmware Rev | X,X,X,X Dec (Note5) | 4 digits |
| 62 | U Integer, MSB First | Reserved | | AA Hex |
| 63 | U Integer, MSB First | Zero Checksum | Value required to make the sum of bytes 0 to 62 added to a multiple of 256 | |

Note:

$$M_2 = 20.48 / 2^{16-1}$$

$$M_3 = 140 / 2^{16-1}$$

$$M_4 = 10 / 2^{16-1}$$

$$M_5 = 20 / 2^{16-1}$$

*Matching unit part number

Notes 1 to 5:

1. Part Number Example: M4065-4
- 2.

| Byte No' | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39-51 |
|-----------|----|----|----|----|----|-----|----|-------|
| Character | M | 4 | 0 | 6 | 5 | (-) | 4 | 0 |
| Hex | 4D | 34 | 30 | 36 | 35 | 2D | 34 | 00 |

3. Serial Number Example: 25

| Byte No' | 52 | | 53 | | 54 | | 55 | |
|------------|--------|--------|--------|--------|--------|--------|--------|--------|
| Dec Number | 0 | 0 | 0 | 0 | 0 | 0 | 2 | 5 |
| Binary | "0000" | "0000" | "0000" | "0000" | "0000" | "0000" | "0010" | "0101" |

4. Date Code Example: week 35 of 2018

| Byte No' | 56 | | 57 | |
|------------|--------|--------|--------|--------|
| Dec Number | 3 | 5 | 1 | 8 |
| Binary | "0011" | "0101" | "0001" | "1000" |

5. Hardware Rev Example: B01 Rev (-), B01 Rev A

| Byte No' | 58 | 59 |
|-----------|-----|----|
| Character | (-) | A |
| Hex | 2D | 41 |

6. Firmware Rev Example: 2.1.0.0

| Byte No' | 60 | | 61 | |
|------------|--------|--------|--------|--------|
| Dec Number | 2 | 1 | 0 | 0 |
| Binary | "0010" | "0001" | "0000" | "0000" |

5.2 VITA 46.11 Tier 1 and Tier 2 IPMC

Please see 46.11 User Manual for detailed information of operation. Sensors included are seen in the table below.

| Record ID | Sensor ID | Sensor Type | Name |
|-----------|-----------|-------------|-----------------------------|
| 0000 | 00 | F0h | FRU State Sensor |
| 0001 | 01 | F1h | System IPMB Link Sensor |
| 0002 | 02 | F2h | FRU Health Sensor |
| 0003 | 03 | 02h | FRU Voltage Sensor |
| 0004 | 04 | F3h | FRU Temperature Sensor |
| 0005 | 05 | F4h | Payload Test Results Sensor |
| 0006 | 06 | F5h | Payload Test Status Sensor |
| 0100 | 07 | 02h | VS1 Voltage |
| 0103 | 0A | 02h | 3.3VAux Voltage |
| 0106 | 0D | 03h | VS1 Current |
| 0109 | 10 | 03h | 3.3VAux Current |
| 010C | 13 | 01h | Analog Temperature |
| 010D | 14 | 01h | Analog Temperature 2 |
| 9999 | N/A | N/A | Device Management |

M4703 Series– DC/DC Power Supply

Pin Assignment

Connector P1:

Connector type: 6450849-6 or eq

| Pin Number | Pin Name |
|------------|----------------------|
| P10 | 12V/35A (VS1, VS2) |
| P9 | 12V/35A (VS1, VS2) |
| A9 | 12V_SENSE |
| B9 | 12V_SENSE |
| C9 | 12V_SENSE |
| D9 | Sync in |
| A8 | 12V_SENSE_RTN |
| B8 | 12V_SENSE_RTN |
| C8 | 12V_SENSE_RTN |
| D8 | Sync Out |
| A7 | 12V_CS |
| B7 | 12V_ACS |
| C7 | 3.3Vaux_CS |
| D7 | SIGNAL_RETURN |
| P8 | POWER_RETURN |
| P7 | POWER_RETURN |
| A6 | SCL_B |
| B6 | SDA_B |
| C6 | -12V_AUX / N.C |
| D6 | SYSRESET* |
| A5 | GAP* |
| B5 | GA4* |
| C5 | SCL |
| D5 | SDA |
| A4 | GA3* |
| B4 | GA2* |
| C4 | GA1* |
| D4 | GA0* |
| A3 | N.C |
| B3 | +12V_AUX/N.C |
| C3 | N.C |
| D3 | N.C |
| P6 | 12V/35A (VS1, VS2) |
| P5 | 12V/35A (VS1, VS2) |
| P4 | POWER_RETURN |
| P3 | POWER_RETURN |
| A2 | N.C |
| B2 | FAIL* |
| C2 | INHIBIT* |
| D2 | ENABLE* |
| A1 | N.C |
| B1 | 3.3Vaux ACS |
| C1 | 3.3Vaux Sense |
| D1 | 3.3Vaux Sense return |

Connector P0

Connector type: 2348886-1 or eq.

| Pin Number | Signal Name |
|------------|-------------|
| P7 | +DC |
| P6 | +DC |
| P5 | -DC |
| P4 | -DC |
| P3 | |
| P2 | |
| P1 | CHASSIS_GND |

M4703 Series– DC/DC Power Supply

| | |
|----|--------------|
| P2 | 3.3V/15A |
| P1 | POWER_RETURN |

